


## ND3357 Top Hinged Lid

For FELs In DIN width

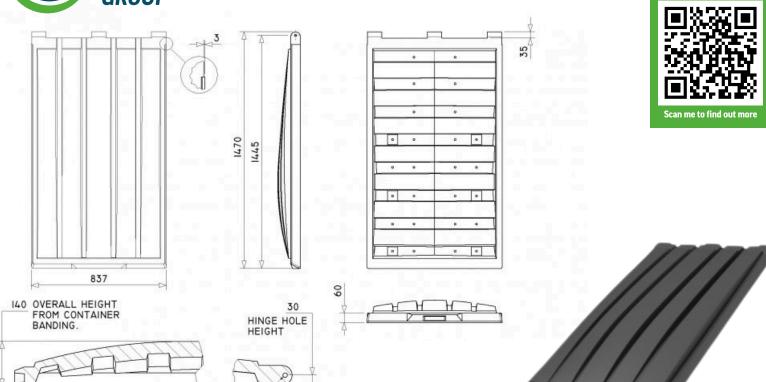

## **SPECIFICATION**

Normally used as a pair

Standard Spec

Rotationally moulded from UV-stabilised LMDPE

Ø14MM I/D STEEL TUBE TO SUIT Ø12 HINGE ROD.

Double-walled

Oil, chemical and frost resistant

100% Recyclable

Sloped back hinge for extra strength

5 reinforced ribs for maximum strength

3 Hinge lugs for optimal strength

Equipped to accept automatic locks

Can be personalised with custom name plate

Integral front handle

Dimensions: MM

Nestable design for cost-effective freight

IEG products are covered with a 12 Month Guarantee, so you can rely on

us to maintain hygienic and sustainable community & commercial spaces.

Optional Extras

Available in ca. 240mm shorter (ND3347)

Hinge plates

Automatic lock

Available in Black and a wide variety of colours

## Meet your sustainability goals, partner with IEG

The details provided in our specification sheets are for your general information and use only.

They are subject to change due to the continual design and build development.





+44 (0)1246 853 696



enquiries@iegemea.com iegemea.com



REGISTERED

