

Waste Management & Recycling

TECHNICAL SPECIFICATION


2-Wheeled Bin Series

ssi-schaefer.com

ALWAYS A STEP AHEAD



SSI SCHAEFER

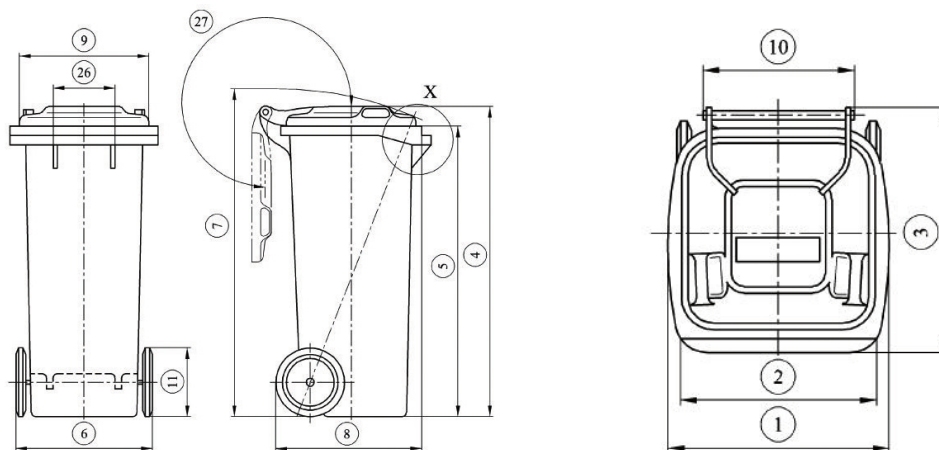

Drawing according to DIN EN 840.

Type	1	2	3	4	5	6	7	8	9	10	11	Payload	Axle length
Pro 60 Wave	446	446	514	922	865	443	-	444	406	320	200	40	423,5
Pro 80 Wave	448	448	514	932	872	443	967	432	400	323	200	40	423,5
Pro 120 Wave	482	482	555	940	875	491	984	483	439	379	200	48	471,5
GMT 120 eXtra	482	482	555	934	873	491	978	479	440	370	200	56	471,5
GMT 140 eXtra	482	482	555	1058	997	491	1094	473	437	380	200	56	471,5
GMT 180 extra	479	479	551	1056	998	493	1088	500	438	375	200	72	471,5
GMT 240 eXtra	580	580	729	1069	997	572	1148	608	549	424	200	96	552,5
Pro 240 Wave	580	580	729	1074	1002	572	1153	608	549	424	200	96	552,5
GMT 360	592	580	874	1095	1006	574	1209	631	582	554	200	144	552,5

Actual dimension according to measuring point of DIN EN 840.

- made of high-density polyethylene (HDPE); virgin material (100%)
- with a max. uv-stability: lightproof = 8 acc. to wool scale
weatherproof = 5 acc. to grey scale
- produced in accordance with EN 840 -1, -5, -6 and RAL certification acc. to RAL-GZ 951/1 for higher quality
- lid with noise reduced lid opening acc. to EU Directive 2000/14/EG
- with reinforced lid fixing (4-point hinges 120 - 240 l, 3-point hinges 360 l and 2-point hinges 60 + 80 l)
- with drain rim inside the lid so that the condensation remains in the bin during opening of the lid
- lid handles are slanted for ergonomic handling
- reinforced lifting comb due to the increased number of strengthening ribs
- serially pointed chip nest for the installation of a data carrier
- reinforced wheel housing and external wheels for high stability

www.ssi-schaefer.com

0053_012017_san • © by SSI SCHÄFER Printed by Brockhaus GmbH & Co. KG, Dillenburg. We reserve the right to make country-specific changes and/or technical modifications to any of the products shown in this catalogue. Note that certain colours may not appear in print exactly as on the actual products. This catalogue is supplied E&OE.

SSI SCHÄFER