



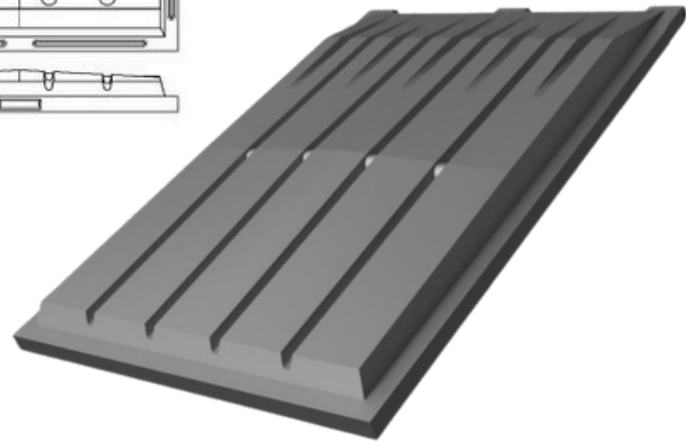

Scan me to find out more

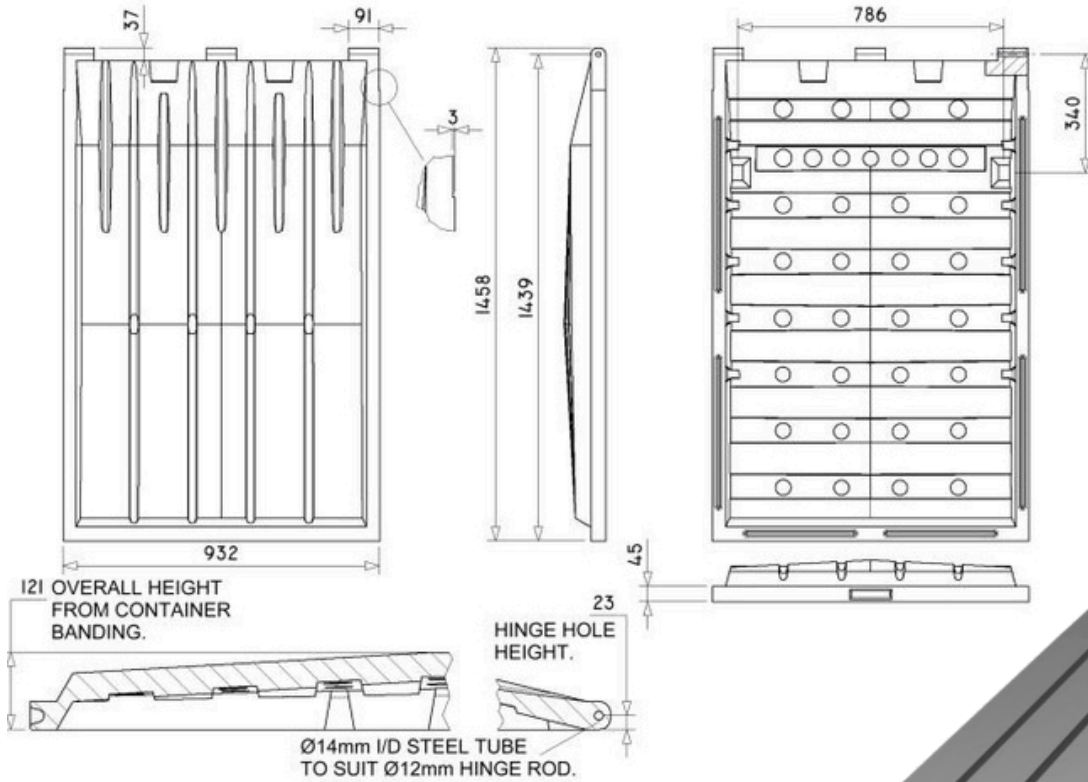

Dimensions: MM

SPECIFICATION

Normally used as a pair

Standard Spec

- Rotationally moulded from UV-stabilised LMDPE
- Double-walled
- Oil, chemical and frost resistant
- 100% Recyclable
- 5 ribs for maximum strength
- Sloped back hinge for extra strength
- Additional strengthening channels & kiss offs underneath
- Bend inducer to allow lid to flex to prevent damage

- 3 hinge lugs for optimal strength
- Moulded-in handle
- Extra ribs for maximum robustness
- Nestable design for cost-effective freight

Optional Extras

- Hinge plate
- Automatic lock
- Available in Black and a wide variety of colours

Meet your sustainability goals, partner with IEG

The details provided in our specification sheets are for your general information and use only. They are subject to change due to the continual design and build development.



Moore Close, Holmewood Industrial
Park Chesterfield, Derbyshire, S42
5UX

+44 (0)1246 853 696
enquiries@iegemea.com
iegemea.com

