




## Specification

Our APK D48 Fully Automatic Baling Press is ideal for those seeking to minimise the space taken up by waste products and make it more manageable. With fast cycle time, large loading aperture, heavy duty compaction and low noise levels, our APK D48 Fully Automatic Baling Press is also the perfect choice for those keen to reap the benefits of recycling whether improving your carbon footprint or receiving payment for any recycled materials

The balers are easy to operate, safe to use and backed by a network of our own engineers to ensure maximum reliability for use with offensive waste and are also suitable for general and food waste, where environmental and hygiene requirements demand a sealed unit or where space is at a premium.

IEG products are also covered with a **12 Month Warranty**, so you can rely on us to maintain hygienic and sustainable community & commercial spaces.

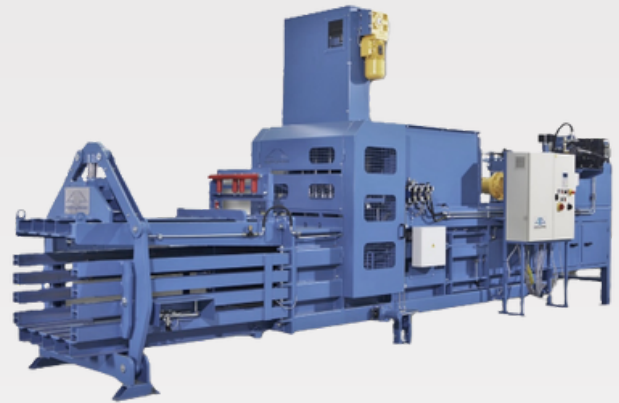

## Technical Information

|  |  |
|--|--|
| COMPACTION FORCE   | 64 Tonnes  |
| POWER REQUIREMENT  | RCD Protected 3-phase earth and neutral 415v/65 amp with D Type motor rated breakers terminated within 2 metres of machine |
| If you have an existing supply that doesn't match this specification, please contact <a href="mailto:technical@iegemea.com">technical@iegemea.com</a> to check if it's usable or discuss a solution) |  |
| MOTOR  | 22kW/30kW/45kW   |
| HOURLY THROUGHPUT  | 3.84/5.64/7.56 Tonnes  |
| OPEN CIRCUTED TIME   | 30/20/15 Seconds   |
| LOADING APERTURE   | 1400 x 920mm   |
| MAXIMUM BALE SIZE  | 1000 x 750mm   |
| BALE WEIGHT  | 350-500kg  |
| OVERALL DIMENSIONS   | 8850mm (L) x 3300mm (H) x 2300mm (W)   |
| VARIANT SHOWN  | Standard machine   |

All machines are built following the CE and UKCA guidance and legislation

The details provided in our specification sheets are for your general information and use only.

They are subject to change due to the continual design and build development.