

CP10 SKIP PORTABLE WASTE COMPACTOR

with Lift up lid

Specification

Our CP10 portable compactors are suitable for general waste, where environmental and hygiene requirements demand a sealed unit or where space is at a premium.

Scan me to find out more

With leak resistant seals, fast cycle time, high volume charge box, our portable waste compactors are the perfect choice to minimise your waste costs.

Available in a range of colours, with clear operating instructions and health and safety stickers as standard. Easy to operate, safe to use and backed by a network of our own engineers to ensure maximum reliability.

IEG products are also covered with a **12 Month Warranty**, so you can rely on us to maintain hygienic and sustainable community & commercial spaces.



Technical Information

COMPACTION FORCE 20 Tonnes

POWER REQUIREMENT

32A 3Ph + N + E Socket outlet fused at 32Amp D type with local 30 Milliamp

RCD protection

If you have an existing supply that doesn't match this specification, please contact **technical@iegemea.com** to check if it's usable or discuss a solution)

acadio of alcoucous a conditiony	
MOTOR	5.5kW
NOISE LEVEL	67dB at 3m From Unit
CYCLE TIME	44 Seconds
CHARGE BOX VOLUME	1490mm x 800mm (1.6m³)
VOLUME PER STROKE	1.0m³
RAM DEPTH	530 mm
RAM DIAMETER	2 x 90mm
RUNNING HYDRAULIC PRESSURE	2000 psi
OVERALL DIMENSIONS	4760mm (L) x 2104mm (H) (or 2867mm with lid open) x 1880mm (W)
VARIANT SHOWN	Hydraulic lid

All machines are built following the CE and UKCA guidance and legislation

The details provided in our specification sheets are for your general information and use only.

They are subject to change due to the continual design and build development.
















Realise your sustainability goals, partner with IEG

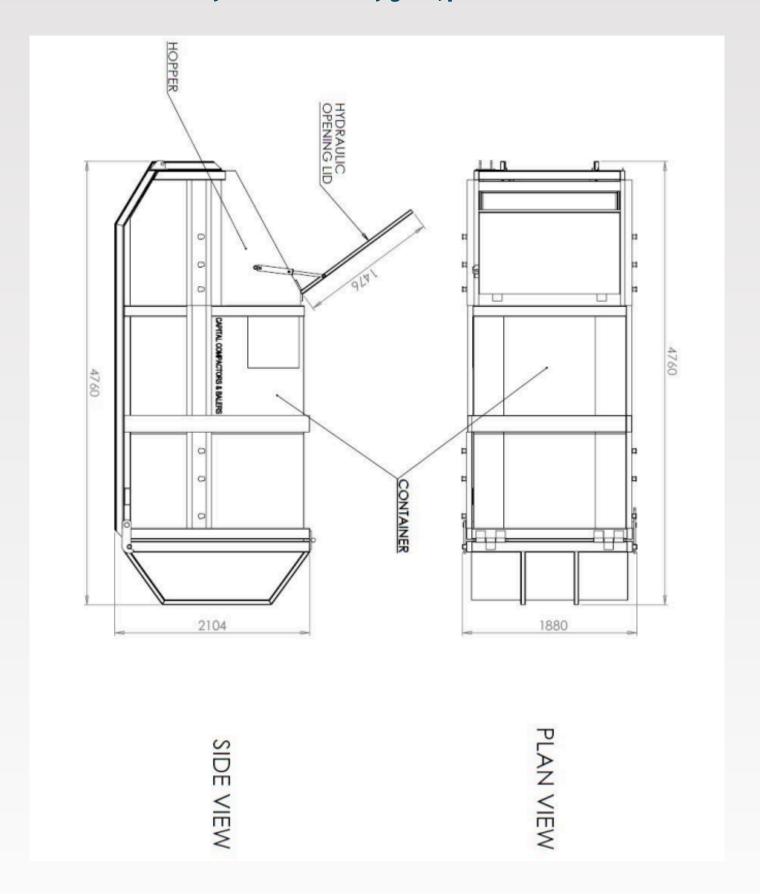

The details provided in our specification sheets are for your general information and use only. They are subject to change due to the continual design and build development.





